

USR5436 & USR805436 WIRELESS USB PRINT SERVER

WIRELESS NETWORKING

The U.S. Robotics Wireless USB Print Server is designed to provide a simple way of sharing USB printers wirelessly, turning standard USB printers into wireless, shared network printers. Featuring easy configuration via your web browser, support for both USB 1.1 and USB 2.0 printers and broad operating system compatibility, USB printers can now be shared over a wireless network and via remote printing using Internet Printing Protocol.

U.S. Robotics®

Easily share your USB printer over a wireless network



Simple Installation and Operation

Easy configuration and management with Web-browser or Windows based utility

Free of Wire Clutter

802.11g wireless connectivity with 54 Mbps performance

Flexible Support for USB

Compatible with USB 1.1 and USB 2.0 printers

Great Compatibility



- Works with all 802.11g and 802.11b networks
- Supports Windows 95/98/Me/NT/2000/XP, Macintosh (9.x or higher) and Linux


Remote Printing Capable

Internet Printing Protocol support (Windows 98/Me/2000 and XP networks)

Variable Address Options

DHCP Client or Auto-IP assignment support



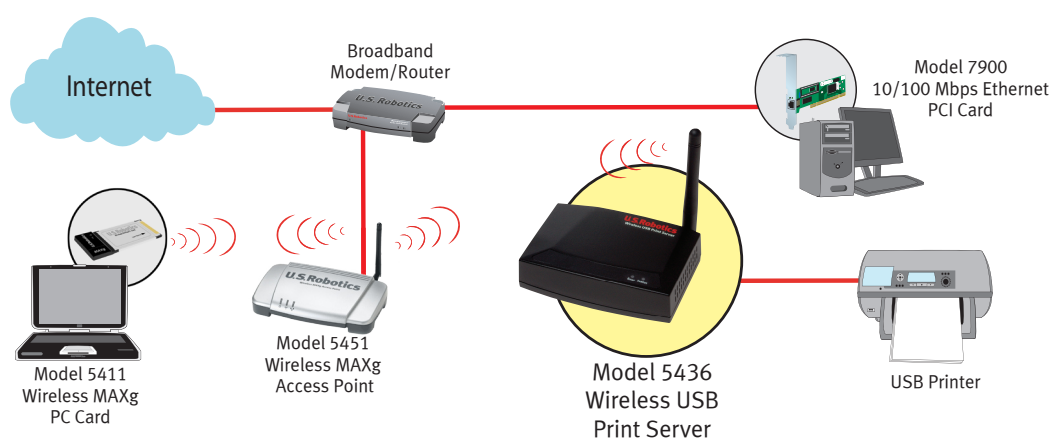

USR5436 & USR805436 WIRELESS USB PRINT SERVER



SPECIFICATIONS AND STANDARDS

- Supports TCP/IP, AppleTalk and NetBEUI protocols
- Wireless 802.11g/b
- 10BaseT/100BaseTx Auto-Sensing
- USB 1.1 and 2.0 support

PHYSICAL

- 1 USB port
- 1 Ethernet port
- 1 Power socket
- 1 integrated 2 dBi antenna
- 2 LEDs – Status & Error indication

WIRELESS

- **Frequency Band:** 2.4 to 2.4835 Ghz
- **Operating Channels:** 1-11 (US/Can) 1-13 (Europe)
- **Security**
 - 64/128-bit WEP encryption
 - WiFi Protected Access (WPA-PSK)
 - Open/Shared authentication support

PRINTING METHODS

- Peer-to-Peer (LPR printing over TCP/IP)
- SMB Printing (via NetBEUI)
- Internet Printing Protocol (IPP)
- AppleTalk (EtherTalk)

MANAGEMENT

- HTML Web-based wizard
- Windows Administrative Tool for managing multiple print servers
- Firmware Upgradable

REGULATORY

- EMI - FCC Class B
- Safety - UL, CUL
- EMI & Safety - CE Class B

PACKAGE CONTENTS

- U.S. Robotics Wireless USB Print Server
- Power adapter
- Quick Installation Guide
- Installation CD-ROM with User Guide

LANGUAGE SUPPORT

USR5436

- **Retail box:** English, French
- **Install guide:** English, French, Italian, German, Spanish and Dutch
- **User guide:** English, French, Italian, German, Spanish and Dutch

USR805436

- **Retail box:** English, French, Italian, German, Spanish and Dutch
- **Install guide:** English, French, Italian, German, Spanish and Dutch
- **User guide:** English, French, Italian, German, Spanish and Dutch

PACKAGE DIMENSIONS/WEIGHT

Dimensions

- Height 7.52 in. (19.1 cm)
- Width 9.37 in. (23.8 cm)
- Depth 2.638 in. (6.7 cm)

Weight

- 1.2 lb (.54 kg)

PRODUCT DIMENSIONS/WEIGHT

Dimensions

- Length 3.74 in. (9.5 cm)
- Width 2.48 in. (6.3 cm)
- Height .98 in. (2.5 cm)

Weight

- 0.13 lb (0.06 kg)

MINIMUM SYSTEM REQUIREMENTS

- HTML 4.01 compliant Web browser
- RJ-45 Ethernet or 802.11g/b wireless LAN connection
- Works with USB printers that support a page description language (eg. PostScript, PCL, etc.).
- Windows 95 or higher, Macintosh 9.x or higher or Linux

WARRANTY

- Two-year limited warranty from date of purchase

U.S. Robotics®

IC Approved
Approuvé par IC

FC

UL US

CE06810

